


# Hunter's Lodge Plans


## Front Wall

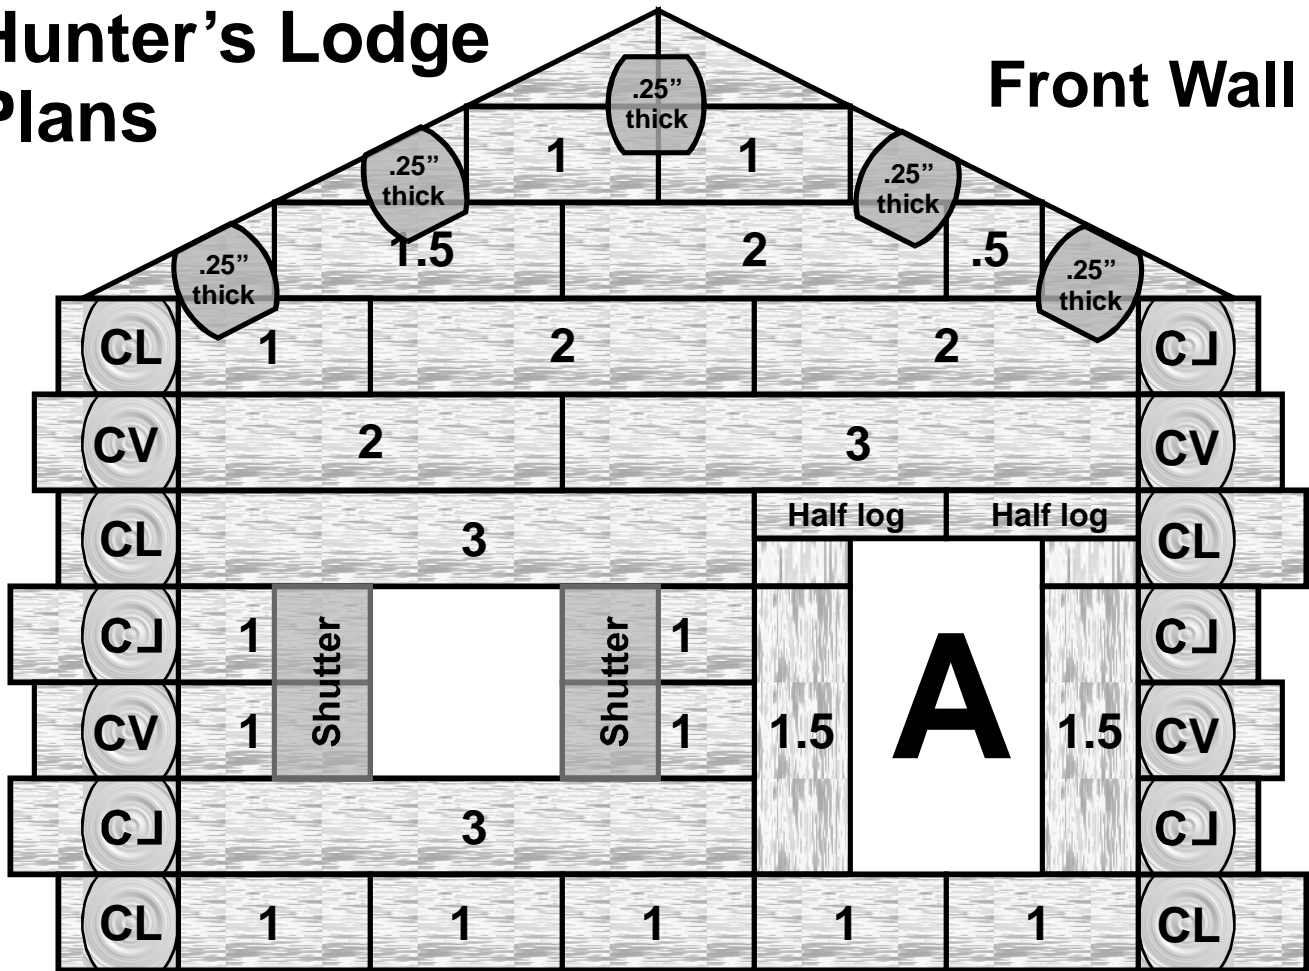


## Side Wall

Shutters glue on top of 1" and 2" log segments.


Make 2 of these

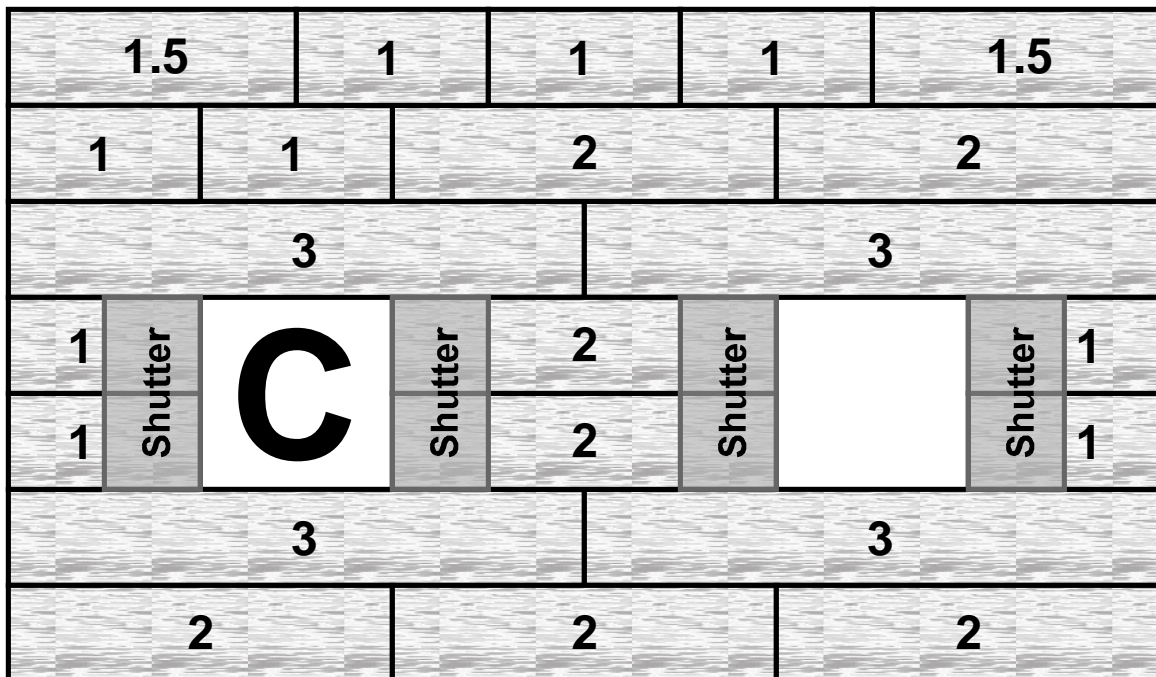

# Back Roof

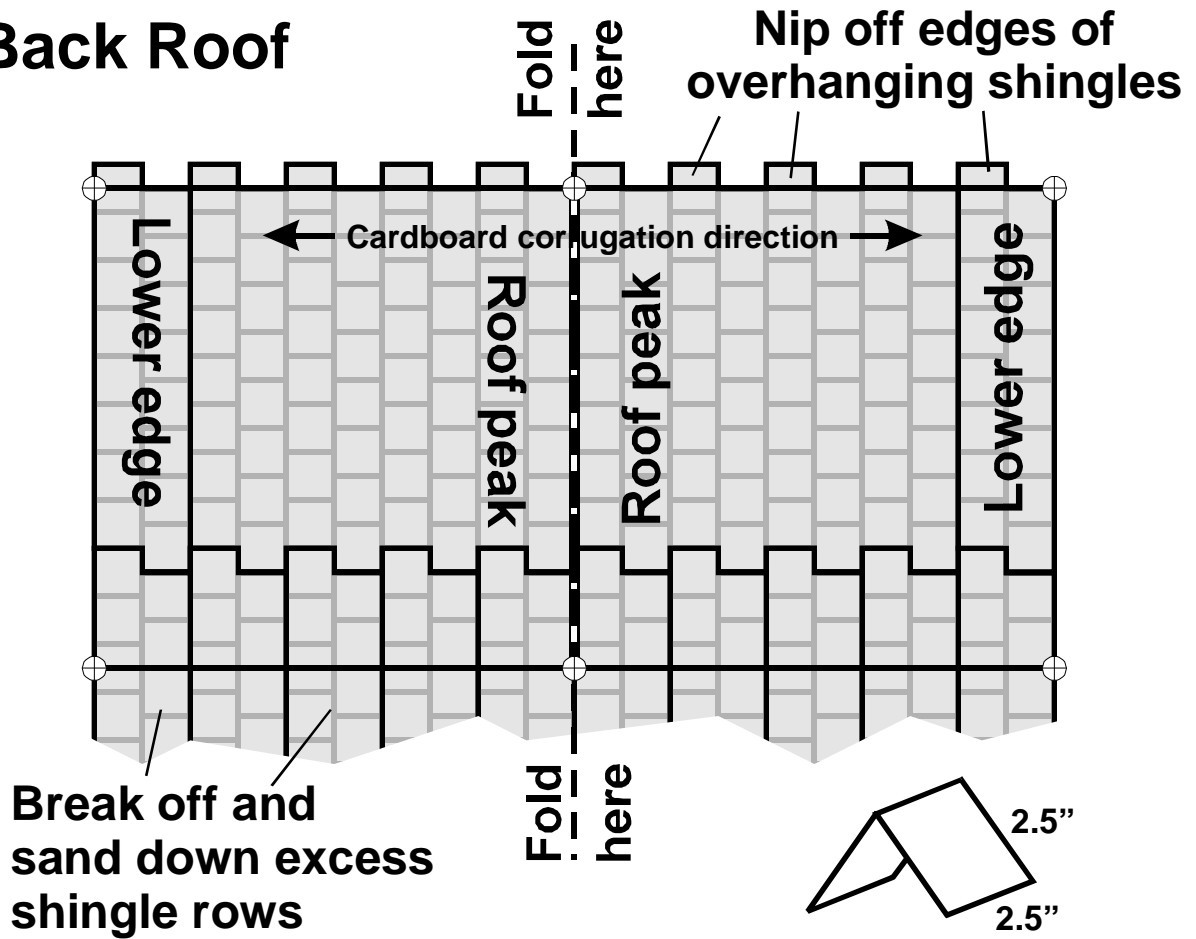


# Back Wall

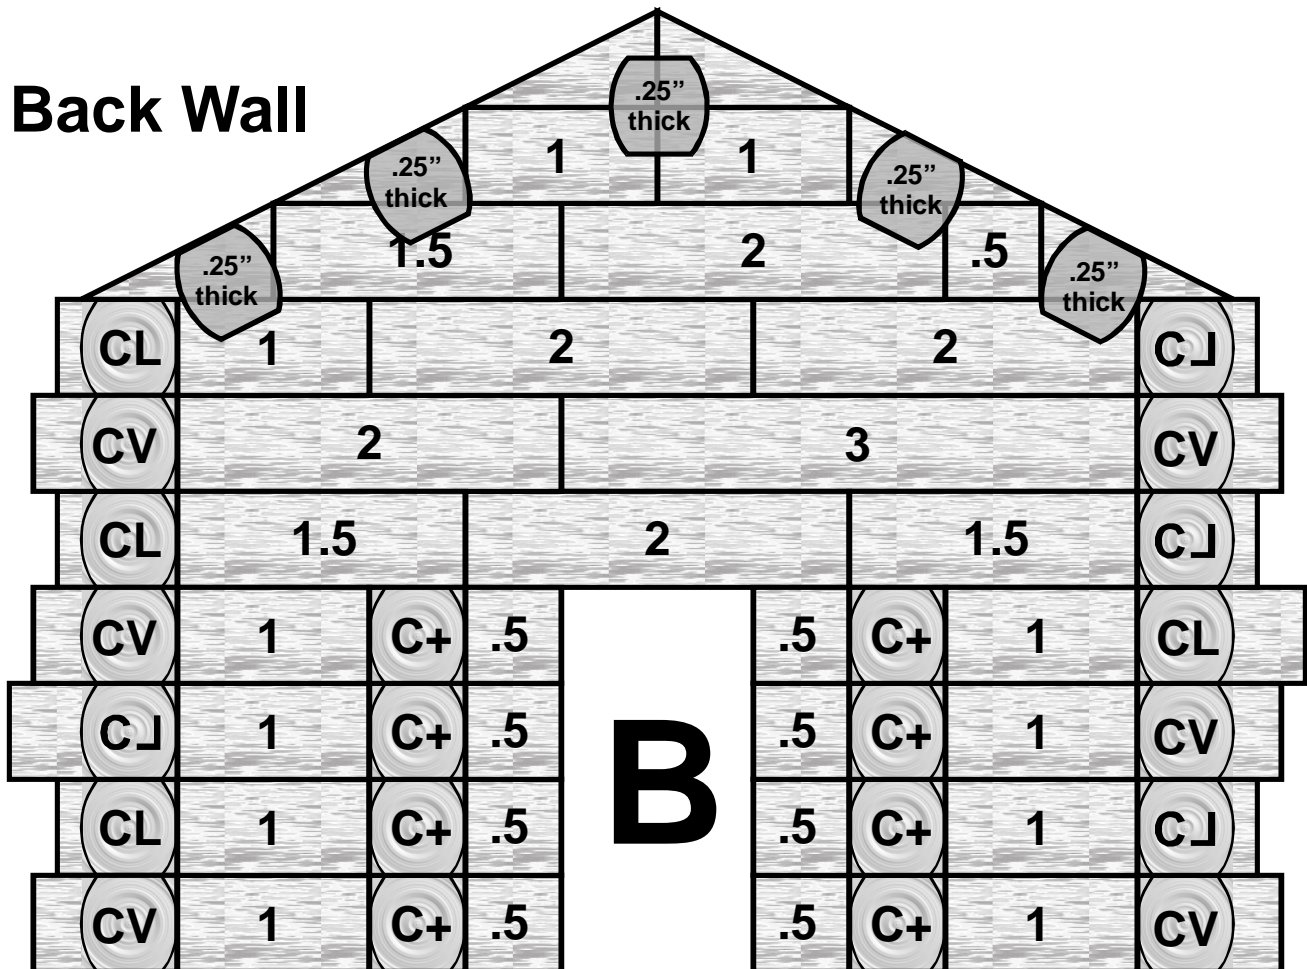





Cross

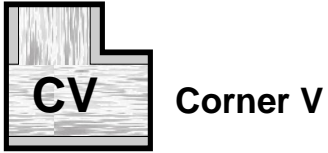


Corner V

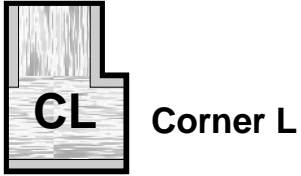

Corner L

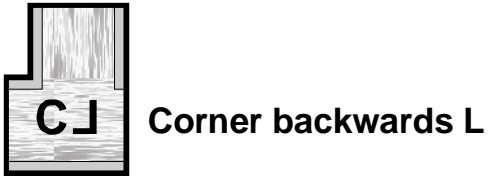

Corner backwards L

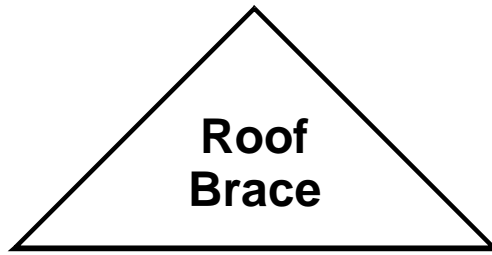


Roof Brace

Front Porch



Half log

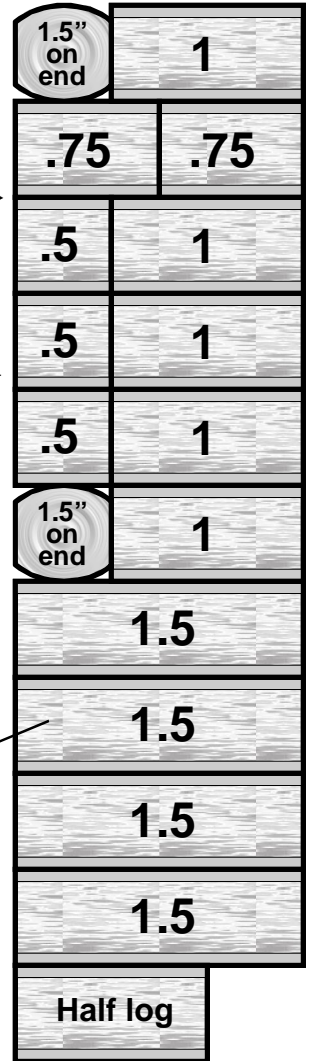

1.5" on end

1

.75

.75

.5

1

.5

1

.5

1

1.5" on end

1


1.5

1.5

1.5

1.5

Half log

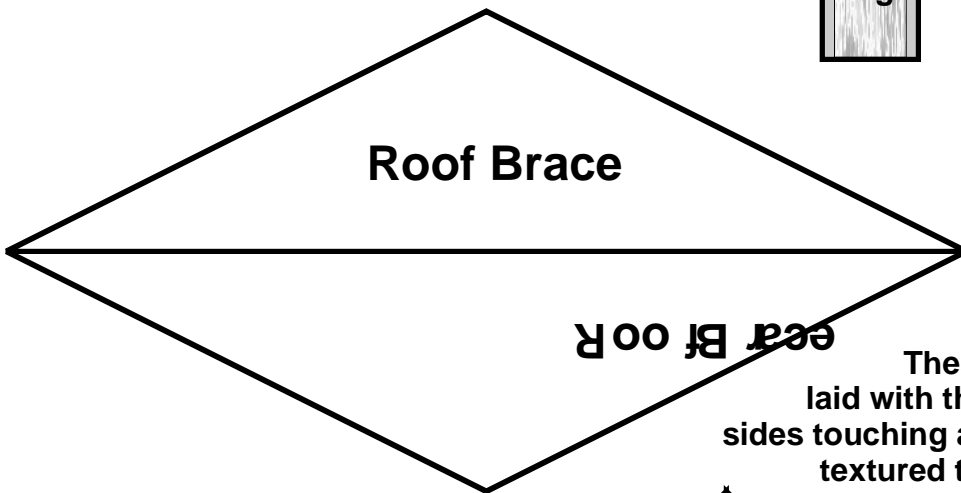

Roof Brace


Back Room

D

These logs are laid with the rounded sides touching and the flat textured top surface facing you.

Back Room

Corners will need to be sanded on both sides so roof will set down flat.

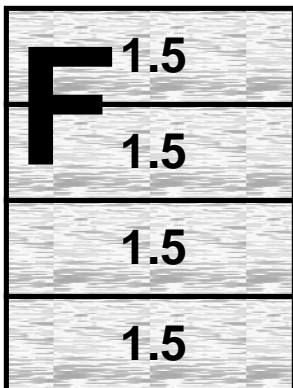


F

1.5

1.5

1.5

1.5

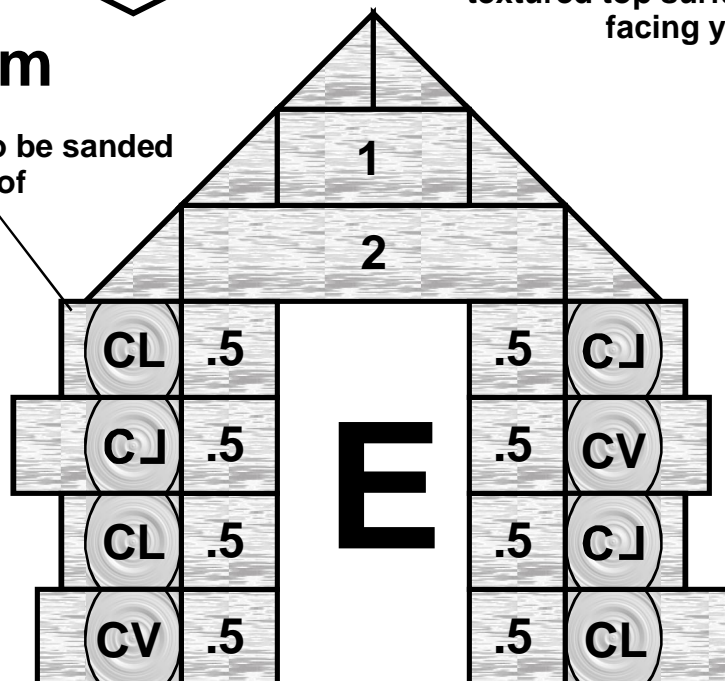

E

CL .5

.5

1

2

CJ .5

.5

CL .5

.5

CV .5

.5

.5

CJ

.5


CV

.5

CJ

.5

CL

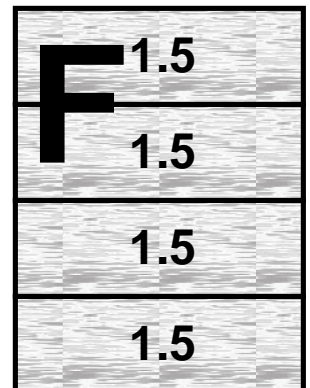

F

1.5

1.5

1.5

1.5

Nip off edges of overhanging shingles

Fold here

# Main Roof

Nine castings of mold #240

← Cardboard corrugation direction →

Lower edge


Roof peak

Roof peak


Lower edge

Nip off edges of overhanging shingles

Fold here

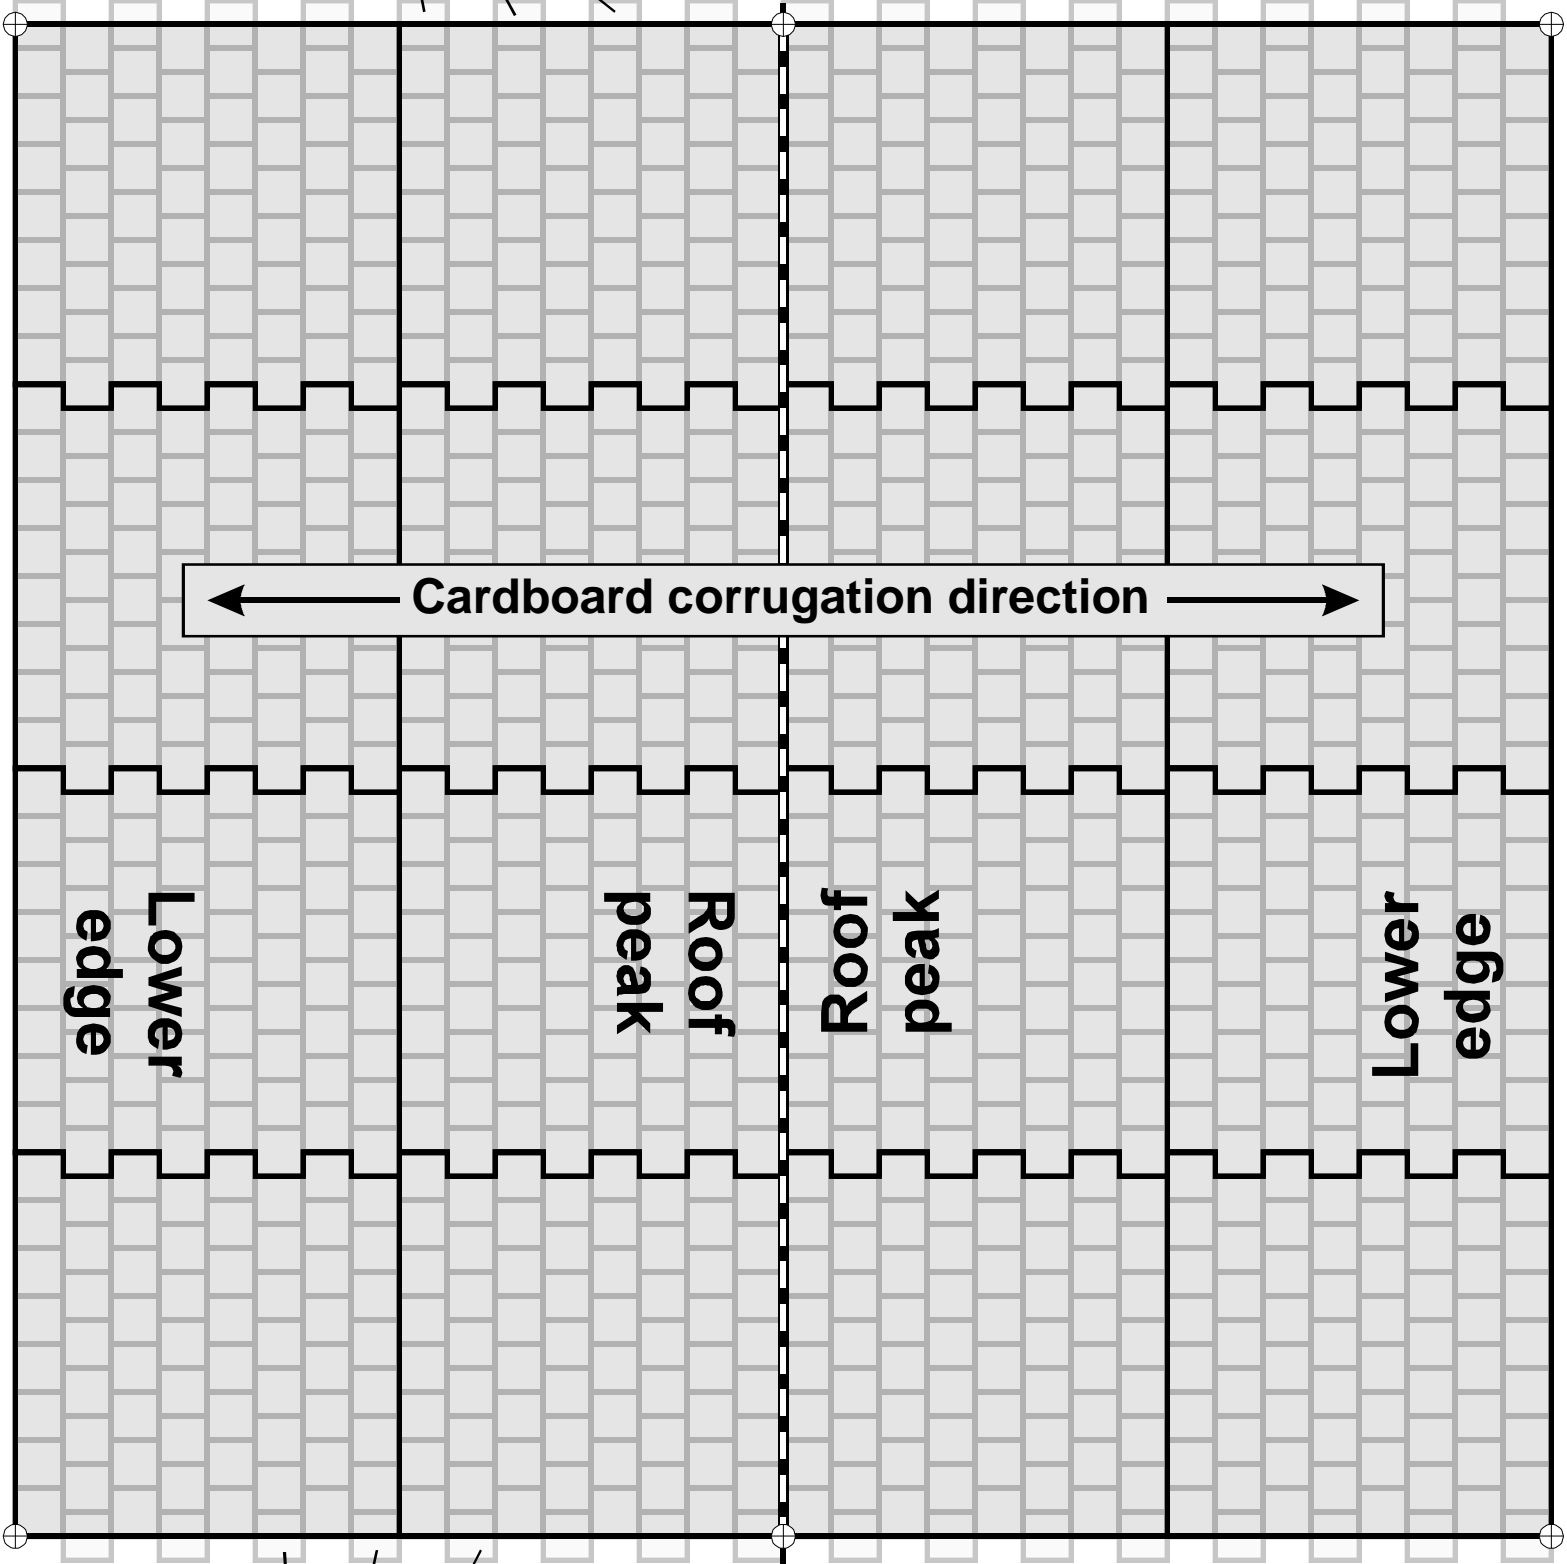

**Optional Floor**

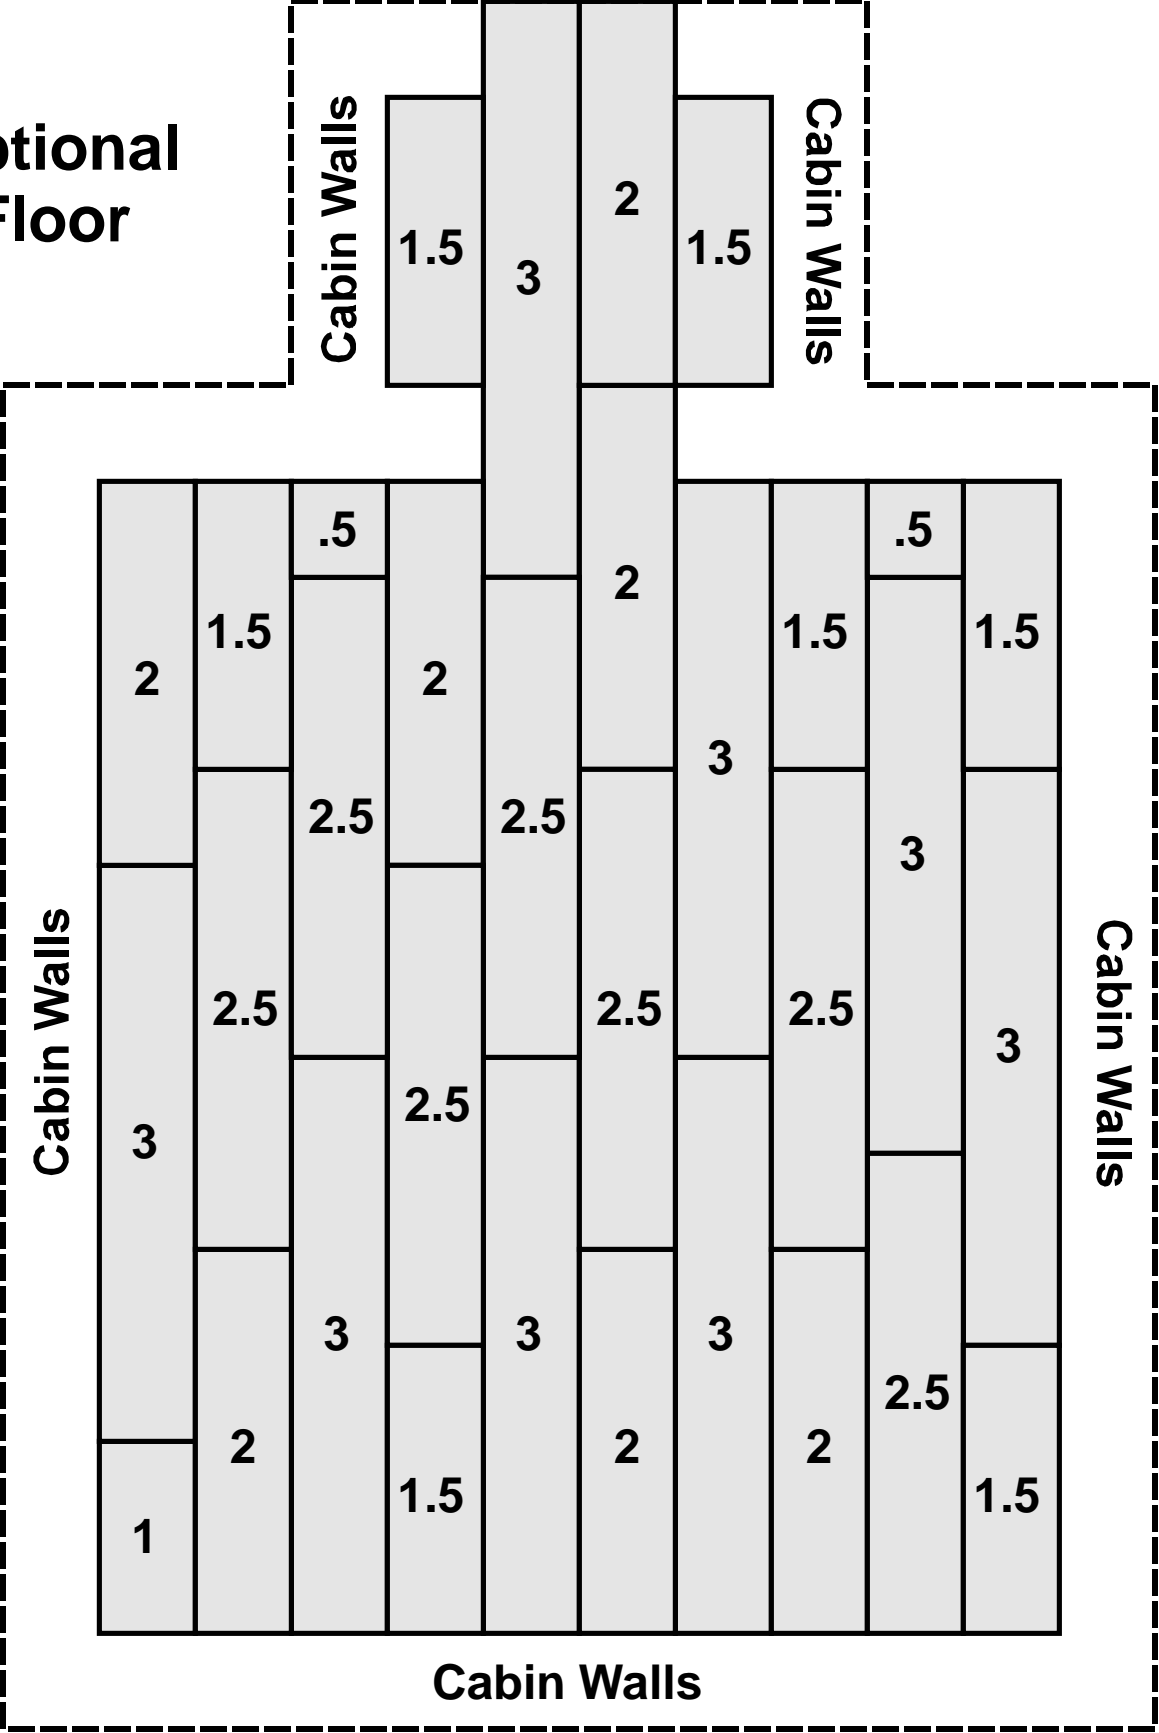

**If you want to add this optional interior floor, you will need 4 castings of mold #226 wooden beam mold.**